

## Cooling King L-Series

Model	Indoor		Wireless	YWM10L	YWM15L	YWM20L	YWM20L	YWM25L	YWM25L
	Wired		YWM10L-SLM	YWM15L-SLM	YWM20L-SLM	YWM20L-SLM	YWM25L-SLM	YWM25L-SLM	
	Outdoor		YSL09C3	YSL15C3	YSL18C3	YSL20C3	YSL20C3	YSL25C3	
Total Cooling Capacity	Btu/hr (ARI)		10,000	13,000	18,000	19,500	21,000	24,000	
Total Power	W		980	1,220	1,630	1,850	1,864	2,675	
Total Current	A		4.38	5.36	7.16	8.12	8.16	12.00	
EER	Btu/hr/W		10.20	10.66	11.04	10.54	11.27	8.97	
Power Source	V/Ph/Hz		220-240/1/50						
Refrigerant Type			R22						
Indoor Air Flow	CFM		342	355	531	531	614	614	
Sound Pressure Level (Hi/Lo)	dBA		38/27	40/29	42/36	42/36	46/40	46/40	
Dimension (HXWxD)	Indoor Unit	mm	288 x 800 x 206	288 x 800 x 206	310 x 1,065 x 224	310 x 1,065 x 224	310 x 1,065 x 224	310 x 1,065 x 224	
	Outdoor Unit	mm	495 x 600 x 245	540 x 700 x 250	654 x 855 x 328	654 x 855 x 328	654 x 855 x 328	756 x 855 x 328	
Unit Weight	Indoor Unit	kg	9	9	14	14	14	14	
	Outdoor Unit	kg	25	28	43	43	43	50	
Copper Pipe Size	Liquid	mm / in	6.4 / 1/4	6.4 / 1/4	6.4 / 1/4	6.4 / 1/4	6.4 / 1/4	9.5 / 3/8	
	Gas	mm / in	9.5 / 3/8	12.7 / 1/2	15.9 / 5/8	15.9 / 5/8	15.9 / 5/8	15.9 / 5/8	

- 1) DUE TO OUR POLICY OF INNOVATION, ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
- 2) ALL UNITS ARE BEING TESTED AND COMPLY TO ISO 5151.
- 3) NOMINAL COOLING CAPACITY ARE BASED ON THE CONDITIONS BELOW:
  - a) COOLING - 27°C DB/19°C WB INDOOR AND 35°C DB/24°C WB OUTDOOR.
- 4) SOUND PRESSURE LEVELS ARE MEASURED IN SOUND ROOM.

[www.york.com.my](http://www.york.com.my)

### Group Associated (C&L) Sdn Bhd (109719-M)

Head Office: Tel: 03-7718 8388 Fax: 03-7727 4371

Email: [sales\\_enquiry@york.com.my](mailto:sales_enquiry@york.com.my), [customer\\_service@york.com.my](mailto:customer_service@york.com.my)

Branches:

- Penang Tel: 04-331 1670
- Johor Tel: 07-557 7788
- Pahang Tel: 09-567 6778
- Perak Tel: 05-548 2307
- Melaka Tel: 06-288 1133
- Sabah Tel: 088-722 194
- Sarawak Tel: 082-333 299
- Negeri Sembilan Tel: 06-768 8969

Service Centre: • Alor Setar • Kota Bharu

Authorized dealer:

Catalogue No: YWML-0712-C




# Cooling King L-series





**Long Air Throw**

New powerful motor combines with advanced control technology to push air further in order to provide a longer air throw which can reach further place. During operation, the air throw can reach up to 6m.

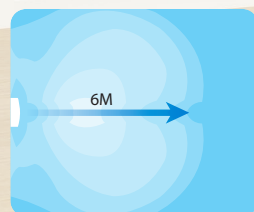

Air Throw reach up to 6m based on CFD simulation results

**Built-in-Starter (BIS)**

Protect air conditioner from overcurrent condition due to malfunctioning of internal parts. This will prolong the unit's lifespan as the unit will be protected from overcurrent.

**High Efficiency Hydrophilic Fin**

It encourages condensation of water. The condensed water moves easily to the drain pan thus enhancing the cleanliness and lifespan of the cooling coil.

**New Lambda( $\lambda$ ) Heat Exchanger**

The new Lambda ( $\lambda$ ) structure with a large surface area makes way for higher heat exchanger efficiency.

**Turbo Mode**

This function is available in COOL and DRY modes. Upon activation, the unit will run to full power with the indoor fan running at high speed for 20 minutes. This will provide a fast cooling during operation.

**Self-Diagnosis System**

The advanced YORK COOLING KING is an intelligent unit equipped with a self-diagnosis system that can detect and indicate malfunctions with LED lights blinking.

**5 Years Warranty**

The outstanding YORK Cooling King L-Series comes with 5 years warranty on the compressor.



## System Features


**Smooth Air Distribution & Quiet Operation**



- SCR motor (Silicon-Control Rectifier), voltage controlled speed provides better and smooth air flow swing.
- High efficiency X-flow fan provides smooth air flow and quiet operation.

**Auto Random Restart**

In the event of a sudden power failure during operation, units can be automatically restarted (subject to certain protection conditions) from last setting condition. This eliminates the need to restart manually after each power failure.

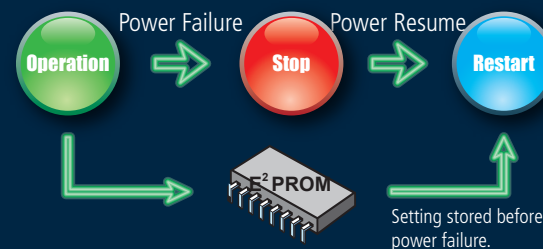

**Compact and Easy-to-use Controller**

- Prominent temperature display.
- Real-time clock display.
- Easily accessible buttons.
- Dedicated buttons for Quiet and Turbo functions.
- Come with Wireless or Wired Controller



GS01 Wireless Controller



SLM 8 Wired Controller